


ELECTRONIC DIGITAL SNAP GAGE



Code	Range
2184-25	0-25mm/0-1"
2184-50	0-50mm/0-2"
2184-100	50-100mm/2-4"
2184-150	100-150mm/4-6"
2184-200	150-200mm/6-8"

- Digital indicator: range 0-10mm/0-0.5"
resolution 0.001mm/0.00005"
rotary display in digit and analog,
tolerance measurement
- Anvil travel 3mm/0.118"
- Carbide flat tips Ø8mm/0.32"
- With spare battery
- Packed in aluminum box

ELECTRONIC DIGITAL SNAP GAGE

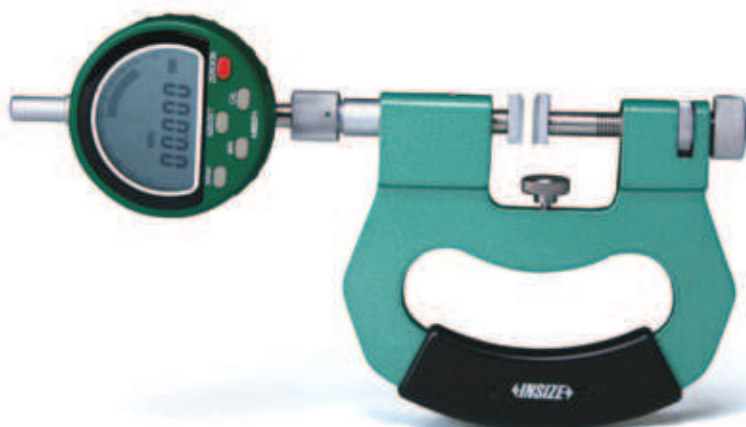

Code	Range
2185-25	0-25mm/0-1"
2185-50	25-50mm/1-2"
2185-75	50-75mm/2-3"
2185-100	75-100mm/3-4"
2185-125	100-125mm/4-5"
2185-150	125-150mm/5-6"
2185-175	150-175mm/6-7"
2185-200	175-200mm/7-8"
2185-225	200-225mm/8-9"
2185-250	225-250mm/9-10"
2185-275	250-275mm/10-11"
2185-300	275-300mm/11-12"

- Digital indicator: range 0-10mm/0-0.5"
resolution 0.001mm/0.00005"
rotary display in digit and analog,
tolerance measurement
- Workpiece support platform Ø15mm/0.6"
- Moving anvil travel 3mm/0.12"
- Measuring anvil: 14x11mm/0.6x0.4"
- With spare battery
- Packed in aluminum box


ELECTRONIC DIGITAL SNAP GAGE



Code	Range
2336-25	0-25mm/0-1"
2336-50	25-50mm/1-2"
2336-75	50-75mm/2-3"
2336-100	75-100mm/3-4"
2336-125	100-125mm/4-5"
2336-150	125-150mm/5-6"

- Electronic digital indicator range 0-10mm/0.5", resolution 0.001mm/0.00005"
- Carbide measuring anvil
- Lifting lever mounted on either right or left side
- Adjustable workpiece support
- Packed in wooden box

MEASURING BENCH

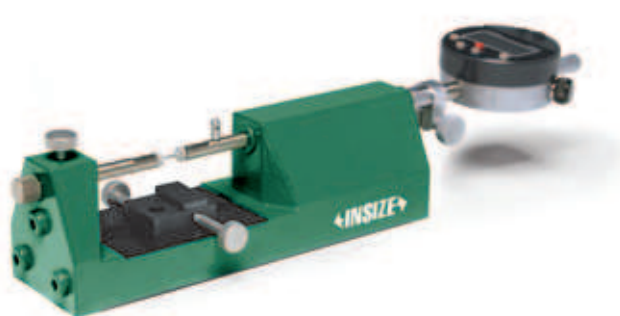

- Digital indicator range 0-10mm/0-0.5"
- Resolution: 0.001mm/0.00005"
- Used horizontally or vertically
- Measuring tips: cylinder tips $\varnothing 1.2\text{mm}/0.05\text{"}$
cylinder tips $\varnothing 2\text{mm}/0.08\text{"}$
blade tips width 6mm/0.24" thickness 0.5mm/0.02"
- Packed in wooden box

Code	Range
2393-30	0-30mm/0-1.18"

